

Door Trim and Auxiliary



Roller Latch with Full Lip Strike Meets ANSI A156.16 for E09091

1442


1" x 3 3/8" (25 mm x 86 mm) Latch Face
1 11/16" x 2 1/4" (43 mm x 57 mm) Strike Size
Cast Metal Strike

Material: Forged Brass

Finishes: US3, US4, US10, US10B, US15A, US19, US26, and US26D only.

* Adjustable Spring Tension.

Fasteners	Quantity	
	Bag	Case
#8 x 1" FHWS, 8/32 FHMS	1 each	50 each



Roller Latch with ASA Strike Meets ANSI A156.16 for E09101

1443


1" x 3 3/8" (25 mm x 86 mm) Latch Face
1 1/4" x 4 7/8" (32 mm x 124 mm) Strike Size
.090" (2.3 mm) Gauge Wrought Metal Strike

Material: Forged Brass

Finishes: US3, US10, US10B, US15A, US19, US26, and US26D only.

* Adjustable Spring Tension.

Fasteners	Quantity	
	Bag	Case
#12/24 FHMS, #8 OH Tapping screws	1 each	50 each




160° Door Viewer

1755

Polybag (1 each)
Solid Brass

Permits one way observation. For doors up to 2 1/8" thick (adjustable). Requires a 1/2" hole.

1755		
Quantity		Avg weight per case (lbs)
Box	Case	
10 each	100 each	7

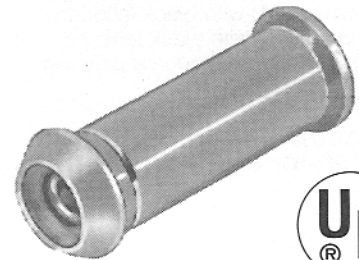


200° Door Viewer

1756

Polybag (1 each)
Solid Brass

Permits one way observation. For doors up to 2 1/8" thick (adjustable). Requires a 9/16" hole.

1756		
Quantity		Avg weight per case (lbs)
Box	Case	
—	50 each	5

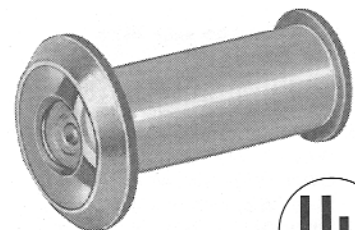

PH. 1-800-325-9995 or 1-314-772-4400 • Fax 1-800-782-0149 or 1-314-772-0744

F37

"THE FIRST FAMILY OF SUPERIOR HARDWARE"

rev. 7/02