

# Door Trim and Auxiliary



## Automatic Flush Bolt Set for Metal Doors

**A, B, C, D, and E Label.**  
**Type #25 ANSI A156.3**

### 292D

**1" x 6 3/4" (25 mm x 172 mm) Face Plate**

**Finishes:** US3, US4, US10, US10B, US26, and US26D only.


**Thermal Lock:** Automatically locks inactive door under high fire/heat conditions.

Used in pairs at top and bottom of inactive door. Fully automatic, when active door is opened, inactive door is free.

**Note:** 280X Dust Proof Strikes (p. 42Y) are recommended for use with these sets.  
 May be used on doors 4 ft. wide and 9 ft. high.



File #  
R7912 (N)

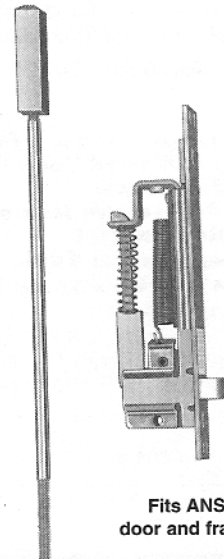

Fits ANSI A115  
door and frame prep.

Fasteners	Quantity	
	Box	Case
2 bolts per set, #8 x 3/4" tapping screws	1 set	10 sets

## Self Latching Bolt Set for Inactive Metal Doors

**A, B, C, D, and E Label.**  
**Type #27 ANSI A156.3**

### 293D

**1" x 6 3/4" (25 mm x 172 mm) Face Plate**

**Finishes:** US26D in stock. Other finishes available on special order.

One set consists of one constant latching bolt, one automatic bolt, one ANSI lip strike, and fasteners.


When inactive door closes, bolt is automatically latched. To unlatch, depress plunger "A".

Constant latching bolt is used at top of door only, an automatic flush bolt is included for bottom of door.

**Note:** 280X Dust Proof Strikes (p. 42Y) are recommended for use with these sets.  
 May be used on doors 4 ft. wide and 9 ft. high.



File #  
R7912 (N)

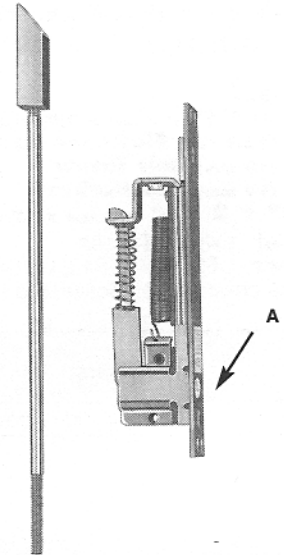

Fasteners	Quantity	
	Box	Case
#8 x 1" tapping screws	1 set	10 sets

## Self Latching Bolt Set for Inactive Wood Covered Composite Doors

**B, C, D, and E Label.**  
**Type #27 ANSI A156.3**

### 294D

**1" x 8 1/2" (25 mm x 216 mm) Face Plate**

**Finishes:** US26D in stock. Other finishes available on special order.

One set consists of one constant latching bolt, one automatic bolt, one ANSI lip strike, and fasteners.


When inactive door closes, bolt is automatically latched. To unlatch, depress plunger "A".

Constant latching bolt is used at top of door only, an automatic flush bolt is included for bottom of door.

**Note:** 280X Dust Proof Strikes (p. 42Y) are recommended for use with these sets.  
 May be used on doors 4 ft. wide and 9 ft. high.



File #  
R7912 (N)

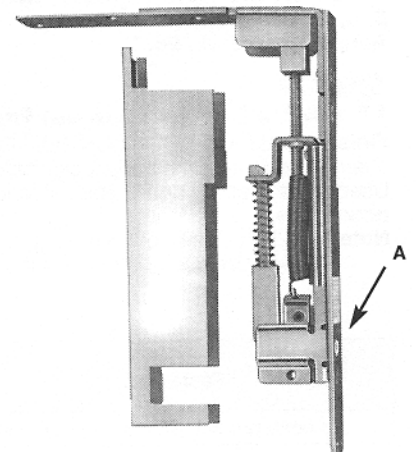

Fasteners	Quantity	
	Box	Case
#8 x 1" tapping screws	1 set	10 sets

F24

PH. 1-800-325-9995 or 1-314-772-4400 • Fax 1-800-782-0149 or 1-314-772-0744

rev. 7/02

"THE FIRST FAMILY OF SUPERIOR HARDWARE"