


▶ PemkoPrene™ - Adhesive Backed Fire / Smoke Gasketing

- Seals begin compressing at 3/16", and both can be compressed sufficiently to seal openings with 1/16" gaps, making door latching easy.
- Excellent resistance to compression set, particularly at elevated temperatures and for extended periods of time.
- Stays flexible between -70°F and 250°F with very high resistance to flex fatigue.

- Outstanding ozone resistance rating.
- Smoke tested by WYLE Laboratories in accordance with UL 1784-90; meets the requirements of NFPA 105 "Installation of Smoke Control Door Assemblies".
- PK33 is designed for tighter frames and demonstrates extremely low closing force.

▶ PK33 PemkoPrene™

- PK33 is designed for tighter frames and demonstrates extremely low closing force.



- **PK33BL** (black)
- **PK33D** (dark bronze)
- **PK33W** (white)

- PK33 is available in: 17', 20', 21', 25' and 510' coils.




Fire Rated
Classified & Listed to meet the requirements of standards UL10B & BS476.
20 minute wood doors meet the requirements of standards UL10C & UBC7-2, Part I

POSITIVE PRESSURE
(20 minute only)




Smoke Tested
Classified & Listed to meet the requirements of standards UL1784 & BS476.
20 minute wood doors meet the requirements of standard UBC7-2, Part II

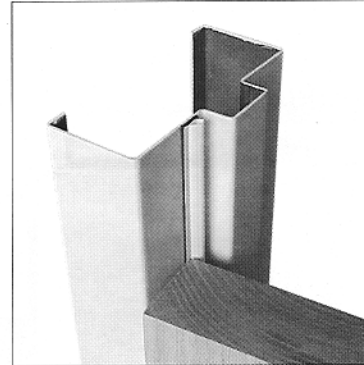

▶ PK55 PemkoPrene™

- PK55 is designed for tighter frames and demonstrates extremely low closing force.



- **PK55BL** (black)
- **PK55D** (dark bronze)
- **PK55W** (white)

- PK55 is available in: 17', 20', 21', 25' and 510' coils.





Fire Rated
Classified & Listed to meet the requirements of standards UL10B & BS476.
20 minute wood doors meet the requirements of standards UL10C & UBC7-2, Part I

POSITIVE PRESSURE
(20 minute only)



Smoke Tested
Classified & Listed to meet the requirements of standards UL1784 & BS476.
20 minute wood doors meet the requirements of standard UBC7-2, Part II

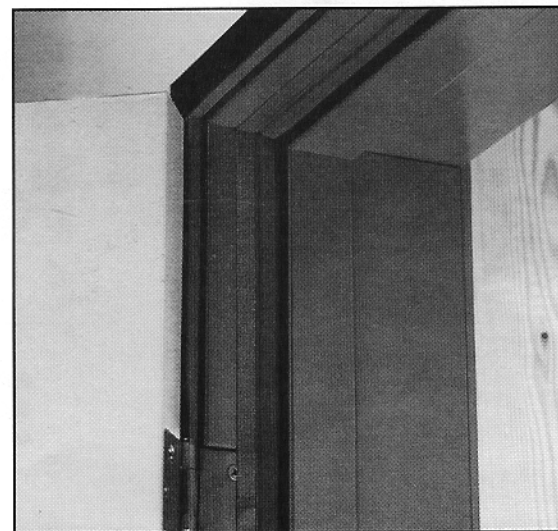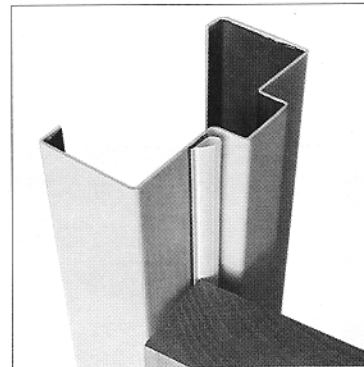

VENTURA, CA
WHITTIER, CA

800 • 283-9988

PEMKO

MEMPHIS, TN

800 • 824-3018

ES
5